




LEDTEC

Curved lighting
Silhouettes of light

BASIC MODULES

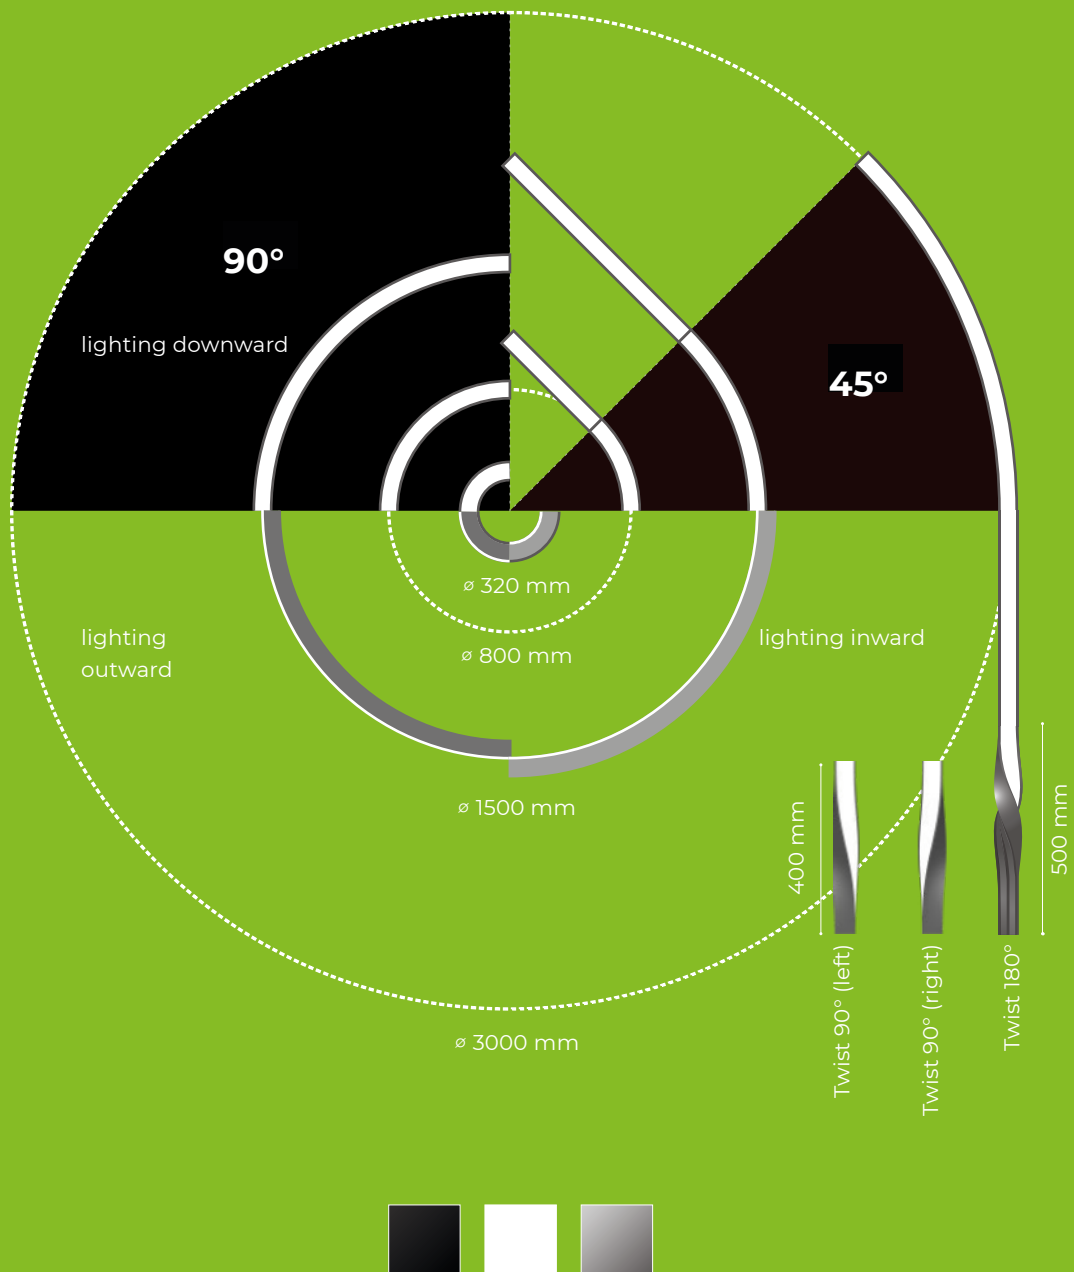

BASIC MODULES

ø800mm, Curve 90°
(Lighting downward)

ø800mm, Curve 45°
(Lighting downward)



ø1500 mm, Curve 90°
(Lighting downward)

ø1500 mm, Curve 45°
(Lighting downward)

ø1500 mm, Curve 90°
(Lighting inward)

ø1500 mm, Curve 90°
(Lighting outward)



ø3000 mm, Curve 45°
(Lighting downward)

Straight Line 2500mm
(Lighting downward)



ø320 mm, Curve 90°
(Lighting downward)

ø320 mm, Curve 90°
(Lighting outward)

ø320 mm, Curve 90°
(Lighting inward)




Twist 90°
(left, 400mm)

Twist 90°
(right, 400mm)

Twist 180°
(500mm)





ø320mm Curve 90°
(Lighting outward)

500mm Twist

400mm, Twist 90°
(left)

ø320mm Curve 90°
(Lighting downward)

APPLICATION PRINCIPLE

The lighting system opens up unlimited possibilities thanks to a multitude of possible combinations.

With the straight and curved basic modules, we can design various circular luminaires, curves and combined structures.

180°

ø320mm Curve 90°
(Lighting inwards)

ø400mm Twist 90°
(right)



ø320mm Curve 90°
(Lighting upwards)








Twisted modules (90°/180°)

CONNECTORS



ACCESSOIRES INSTALLATION





FLEXIBLE COVER



APPLICATIONS



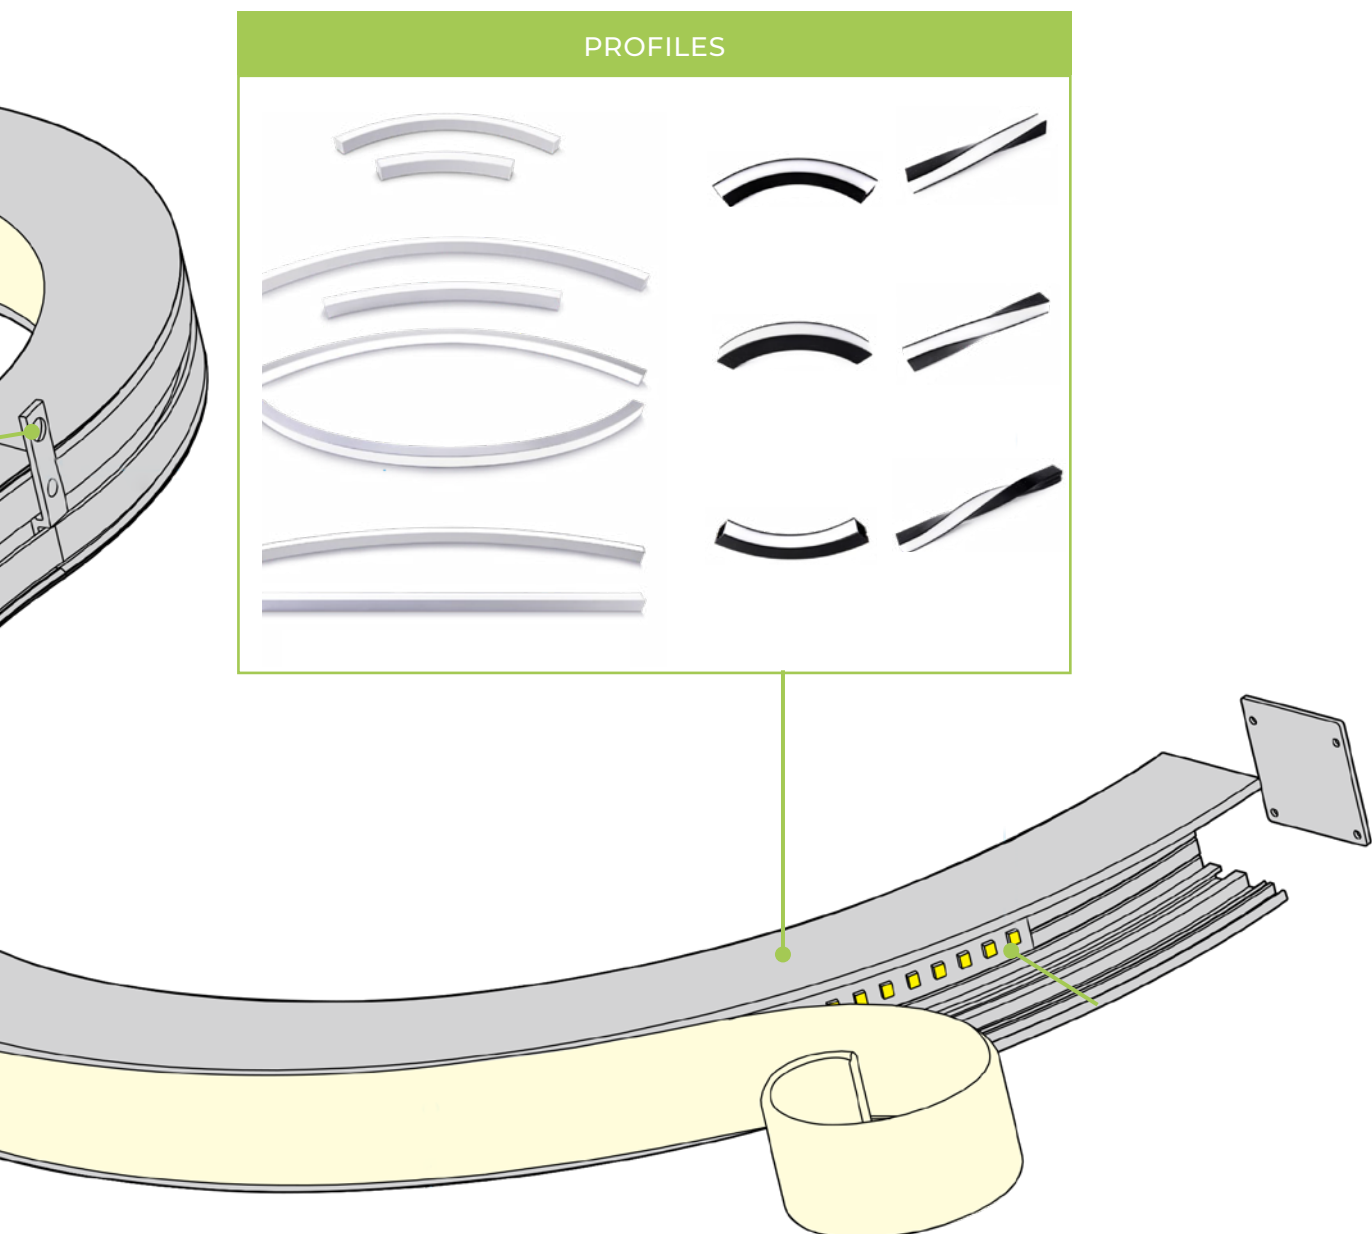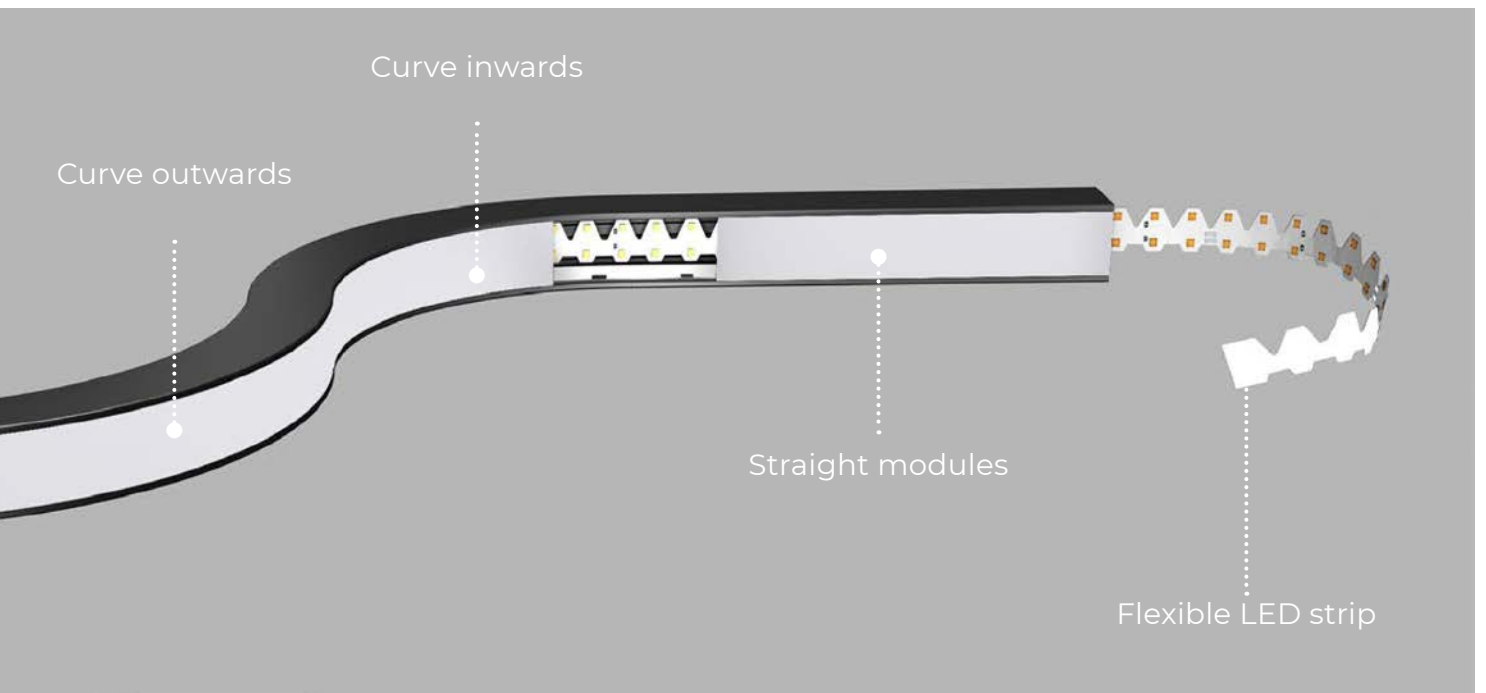




INDIVIDUAL

With the basic modules, circular luminaires with a diameter of 0.8m/1.5m/3.0m can be formed for individual applications.







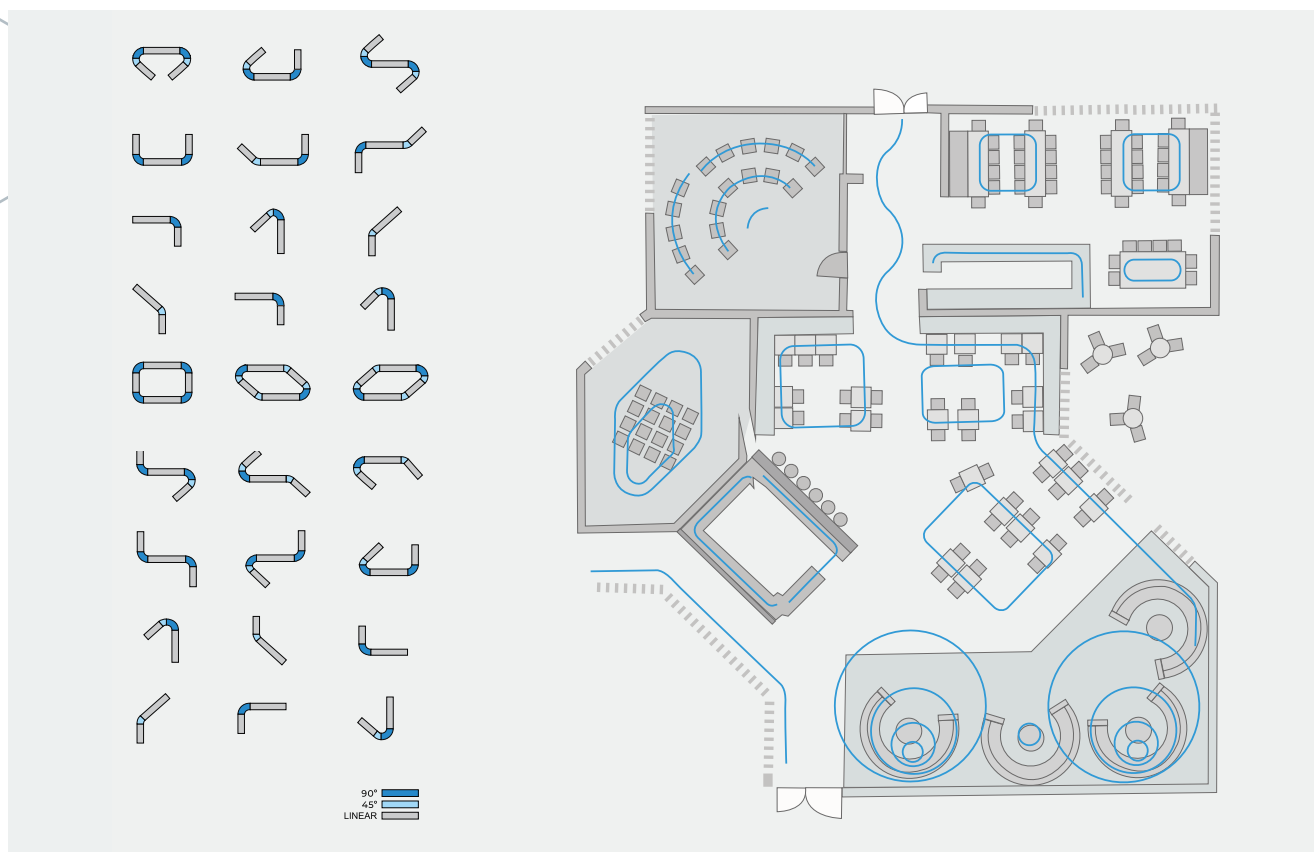































Different beam directions are possible: downwards, outwards and inwards. The wide range of accessories also enables pendant, recessed, surface-mounted and wall-mounted installation - just as desired for your application.

























LIGHTING WITH NO LIMITS

The variations of the profiles allow endless design possibilities for your applications. Adapt your lighting entirely to the individual circumstances. With different diameters, curves and beam directions, there are no limits to your creativity.



PRODUCT OVERVIEW

Part no.		Dimension	Installation
0860120001		35x35mm, ø320mm, 90°	  
0860120002		35x35mm, ø320mm, 90°	 
0860120003		35x35mm, ø320mm, 90°	 
0860120004		35x35mm, 400mm, 90° links	
0860120005		35x35mm, 400mm, 90° rechts	
0860120006		35x35mm, 500mm, 180°	
0860120007		35x35mm, ø800mm, 45°/90°	  
0860120008		35x35mm, ø1500mm, 45°/90°	  
0860120009		35x35mm, ø3000mm, 45°	  
0860120010		35x35mm, 2500mm	  
0860120011		35x35mm, ø1500mm, 90°	 
0860120012		35x35mm, ø1500mm, 90°	 

Housing	Light output	Lighting source	Cover
	downward	Flex. LED strip	
	inward	Flex. LED strip	
	outward	Flex. LED strip	
	Twist 90° left	Flex. LED strip	
	Twist 90° right	Flex. LED strip	
	Twist 180°	Flex. LED strip	
	downward	Flex. LED strip	
	downward	Flex. LED strip	
	downward	Flex. LED strip	
	downward	Flex. LED strip	
	inward	Flex. LED strip	
	outward	Flex. LED strip	



LEDTEC

LEDTEC GmbH

Abelbachstraße 13
33142 Büren-Steinhausen

T. +49 (0) 2951 93838-300

info@ledtec.eu

www.ledtec.eu