

3-Kanal Dimmer DMX

Art.-No.: 0620260001

Features


- DMX512/1990
- Solid steel housing
- 256 dimming levels per DMX channel
- DMX adressing by DIP switches



Mechanical features

Connection (Input)		screw terminal
Cable cross section (input)		max. 1,5 mm ²
Connection (Output)		screw terminal
Cable cross section (output)		max. 1,5 mm ²
Connection type (control signal)		RJ45 socket
Length	A	177 mm
Width	B	42 mm
Height	C	335 mm
Weight		245 g
Distance mounting hole 1	L1	167 mm
Diameter mounting hole	D	3.5 mm


Dimensionen

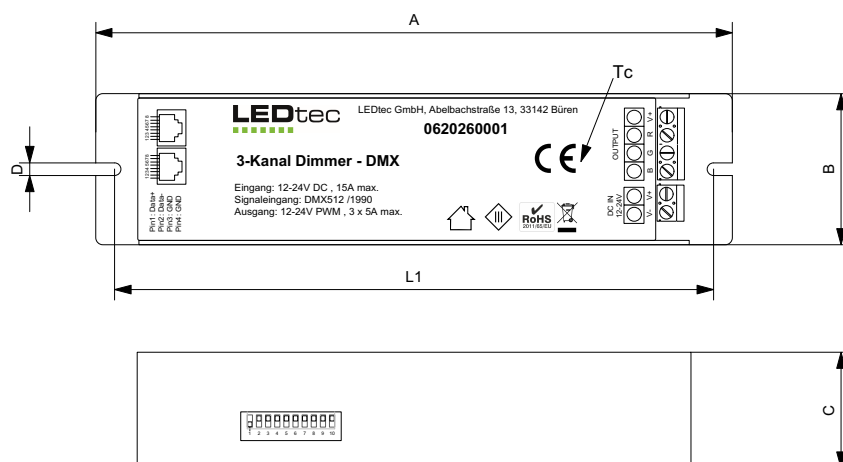

Technische Eigenschaften

Input voltage	12 - 24 V DC
Max. current	15.0 A
Output voltage	12 - 24 V DC
Max. output current	5.0 A/Kanal
Max. controllable power	360W @ 24V
PWM Frequenz	400 Hz
Steuersignale	DMX512 / 1990
Control circuits	3
Dimming method	PWM
Dimming levels	256
Dimming range	0 - 100 %
Over current protection	Ja
Over temperature protection	yes

Anschlussdiagramm

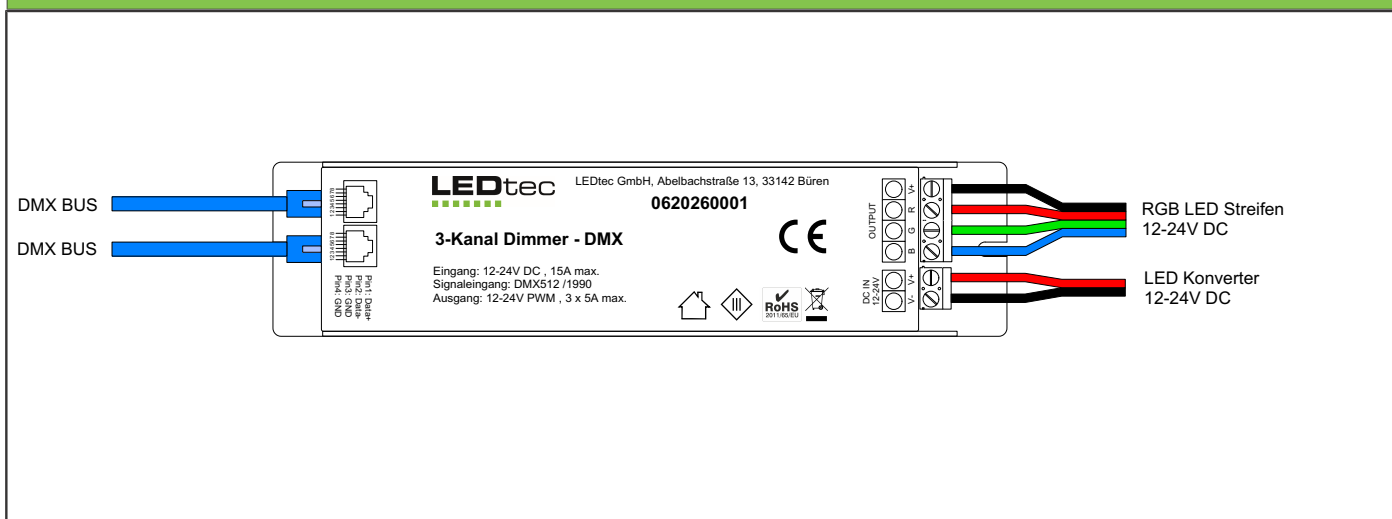

Environmental conditions

Ambient temperature range (Ta)	-20 up to max. 40 °C
Humidity	max. 85%
Storage temperature (Ts)	-20 up to max. 60 °C
Device temperature (Tc)	-20 up to max. 70 °C